


ELECTRONIC CHIME OPTION

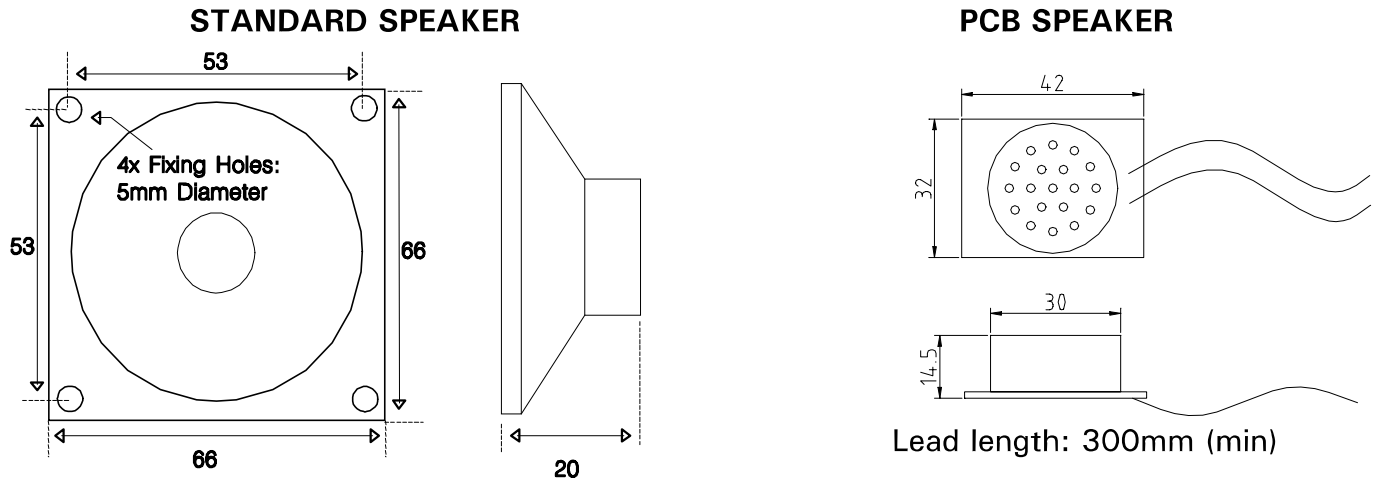

Description

Electronic sounder for lift arrival and departure direction indication.
The unit consists of a small loudspeaker and display unit upgrade.

Standard Features

Volume selectable
Single chime for UP direction, double chime for DOWN direction

Electrical Detail

Power derived from display unit; consumption 50mA @ 12vdc

General

Loudspeaker supplied loose with 300mm of cable attached (longer cable lengths available, please ask)

Options

Single chime both directions
High/low and low/high chime frequency variations for direction indication

THIS PRODUCT MUST BE ORDERED WITH ONE OF OUR DISPLAY UNITS.