


DATA SHEET ELEVATOR ALARM EMP/1

Doc. n°: EMP/1

Date: 08/06/2021

Page: 1/1

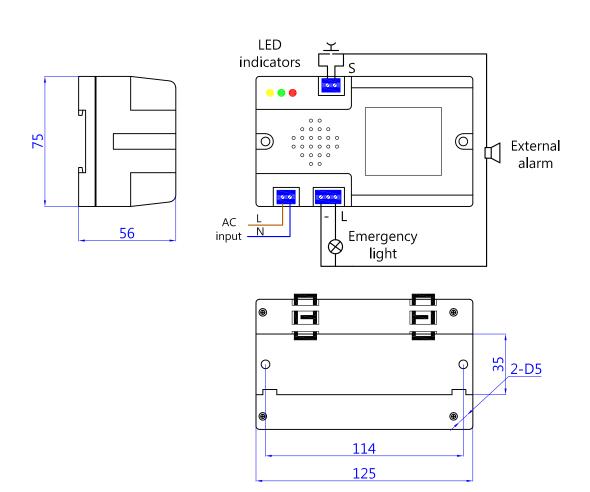

Input voltage	100-240VAC	Battery type	Li-ion
AC power	10W	Battery capacity	7.4V, 2000mAh
Output	12VDC, 1.3A	Housing material	ABS
Peak current	4.4A	Terminal type	KF128-5.08
Emergency power	5W light + 2W alarm	Working temperature	-20°C to 50°C
Emergency time	60mins@5W	Storage temperature	-20°C to 80°C
Internal alarm	N/A	Average lifespan	30,000 hours
Charging time	>10 hours	Weight	235g
LED indicator	Yellow	Green	Red
ON	0	•	•
Status	Charging	Fully charged	On emergency or faulty

^{***}We recommend charging the battery pack every 6 months***

^{***}We recommend replacing the battery pack every 4 years***

^{***}Replacing the Li-ion batteries will void the warranty***