

Ladder type 8 - TRI-KLAPP 115

Technical description

Three-part folding pit ladder with floor attachment for universal mounting in the pit.
Construction according to EN 131, EN 81-1/-2, with ACCESSORY-SET-N acc. to EN 81-20






In the unfolded state the ladder length adds up to 2.56m. The ladder has to be set up in the pit with an angle of 65°-75° according to EN 131, so a tilting backwards is avoided. In the pit must be a STOP switch, which has to be operated before unfolding the ladder.

Transverse mounting




Max. pit depth 1.5m


Longitudinal mounting

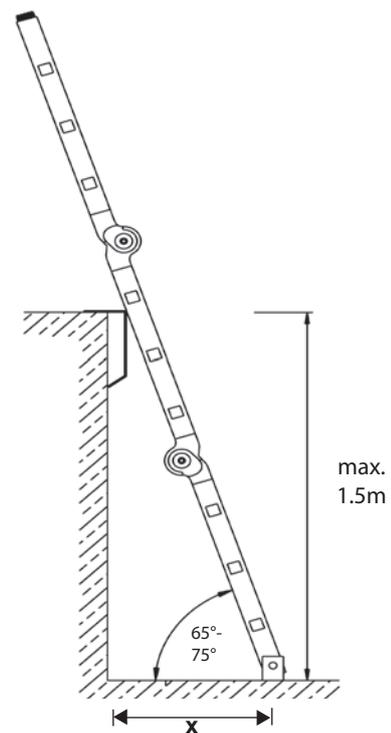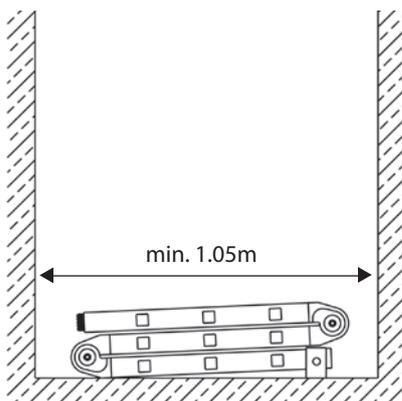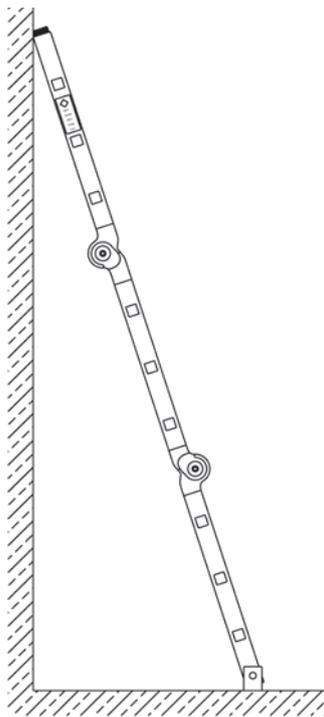


| Distance | x | Pit depth |
|----------|---|-----------|
| 35cm | | 1.2m |
| 40cm | | 1.4m |

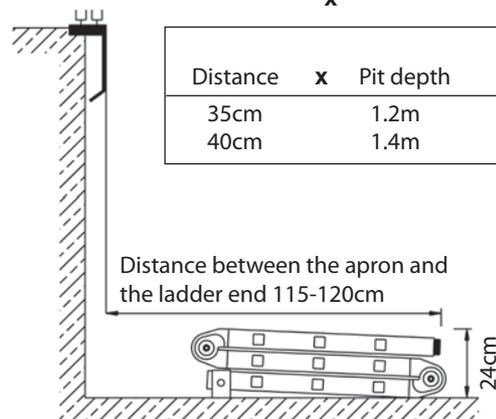

TRI-KLAPP 115

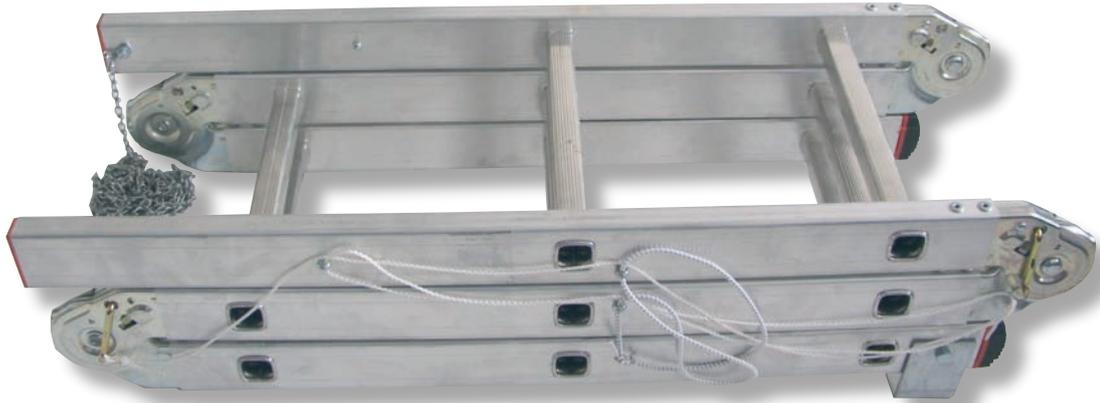

The ladder can be folded by means of a chain and pull cords, which are within reach from the shaft entrance.

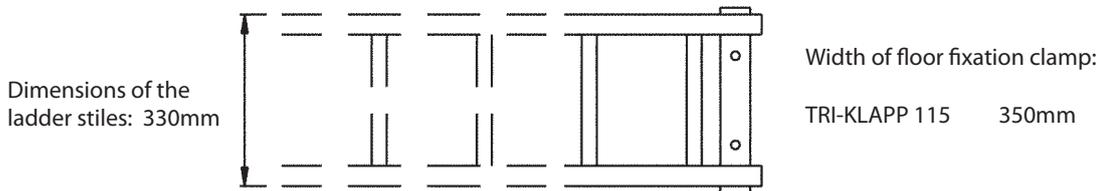

Pit ladder TRI-KLAPP 115

Three-part folding pit ladder with floor attachment

| Art.no. | Description |
|---------|--------------------------|
| 78589 | Pit ladder TRI-KLAPP 115 |




Ladder ACCESSORY SET-N for TRI-KLAPP 115

Accessories to ladder type TRI-KLAPP 115
ACCESSORY SET-N for the mounting or retrofitting of a safety switch with forced actuation 1NC/NO onto the Triklapp 115.

Construction acc. to EN 81-20

acc. to EN 81-20

| Art.no. | Description |
|---------|------------------------|
| 78380 | Ladder ACCESSORY SET-N |

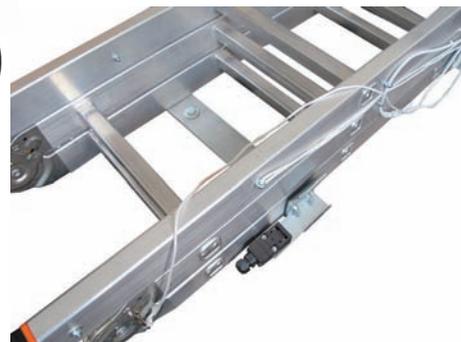

Mounting example ACCESSORY SET-N



Advice:

- a) According to EN 81-20 the ladder has to be so long, that the upper end or other suitable handholds reach out at least 1,10m above the landing door sill in the vertical position of the ladder.
- b) Max. pit depth 1.4m