

LINEAR II

SLIMLINE CCT & POWER SELECTABLE BATTEN



Linear II is a slimline LED batten luminaire suitable for surface mounted or suspended applications. Polycarbonate housing and opal diffuser creates a lightweight batten with a seamless line of sight. With selectable power, 3 CCT and 150lm/W, Linear II is both economical and efficient.

Features

- Surface Mounted or Suspended (LINA-SK)
- Slimline Batten only 27mm depth
- Selectable Power & CCT
- Emergency Compatible (TITANX/5/KIT/230)
- Efficacy of 150lm/w



Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
LIN2/213/CCT	Linear II LED Slim Batten 600mm	1350lm 1900lm	-	9W 13W	150 lm/W
LIN2/433/CCT	Linear II LED Slim Batten 1200mm	3300lm 4800lm	-	22W 33W	150 lm/W
LIN2/541/CCT	Linear II LED Slim Batten 1500mm	4100lm 5900lm	-	27W 41W	150 lm/W
LIN2/650/CCT	Linear II LED Slim Batten 1800mm	5150lm 7200lm	-	33W 50W	150 lm/W

LINEAR II

SLIMLINE CCT & POWER SELECTABLE BATTEN

Specification



Material:-	Polycarbonate
Warranty:-	5 Years
Colour Finish:-	White RAL9003
Colour Temperature:-	3000K 4000K 6000K
IK Rating:-	IK08
IP Rating:-	IP20
LED Lifetime:-	50,000 Hours

CRI:-	80
Working Temperature:-	-20°C to 45°C
Electrical Class:-	Class II
Power Factor:-	0.9
Wattage:-	9W 13W
Voltage:-	220-240V

Maximum Fitting Per Circuit

Automatic Circuit Breaker Type:	C10	C13	C16	C20
Rated Current:	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	2.5
LIN2/213/CCT	85	110	120	170
LIN2/433/CCT	42	55	60	85
LIN2/541/CCT	28	36	40	56
LIN2/650/CCT	22	29	36	45

Dimensions

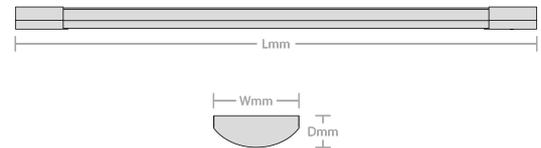

www.redarrowelectrical.co.uk