



COMPONENTI MECCANICI
PER ASCENSORI
MECHANICAL LIFT
COMPONENTS



TENDITORE A MOLLA R4MC 120

SPRING TENSIONER R4MC 120




T242

VERSIONE PAVIMENTO FOSSA / PIT FLOOR VERSION

Corsa scatto contatto 18mm
Contact switching stroke 18mm
Forza min. 517 N max. 965N
Minimum force 517 N max. 965N

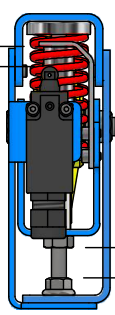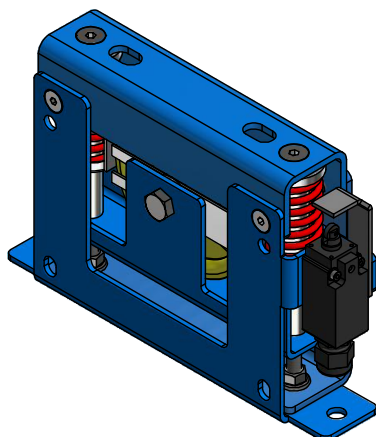

Deviazione max. 20mm
Max. displacement 20mm

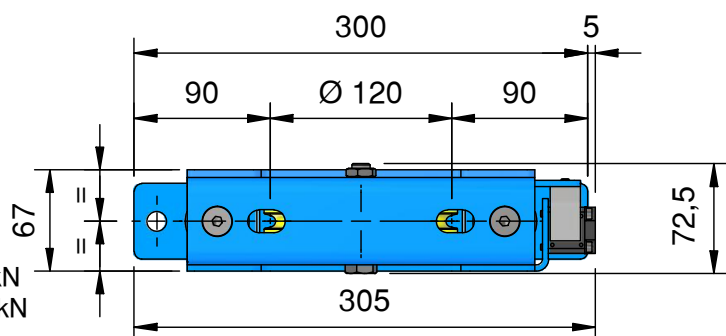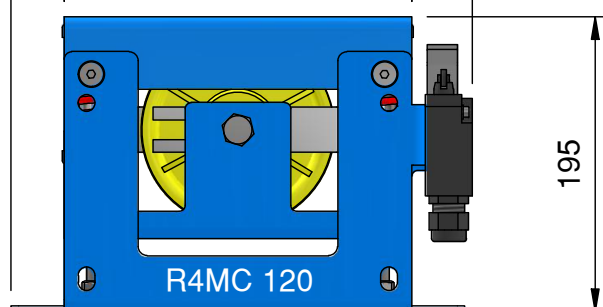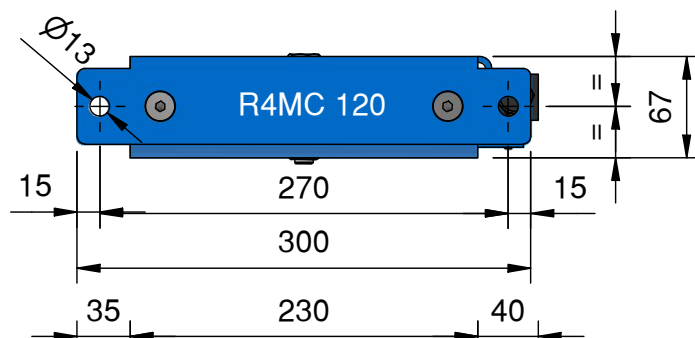

Modello Tenditore Spring tensioner model	Codice Code
R4MC 120	8024213000MC
Supporto Guida Guide bracket	8015000150



(*) Funi anima metallica IWRC d. 6 - 6,5mm Cr min. 25,9 kN

(*) Steel core wire rope IWRC d. 6 - 6,5mm Cr min. 25,9 kN

Velocità intervento max. 2 m/s

Tripping Speed max. 2 m/s

VERSIONE STAFFAGGIO GUIDA / GUIDE BRACKET VERSION

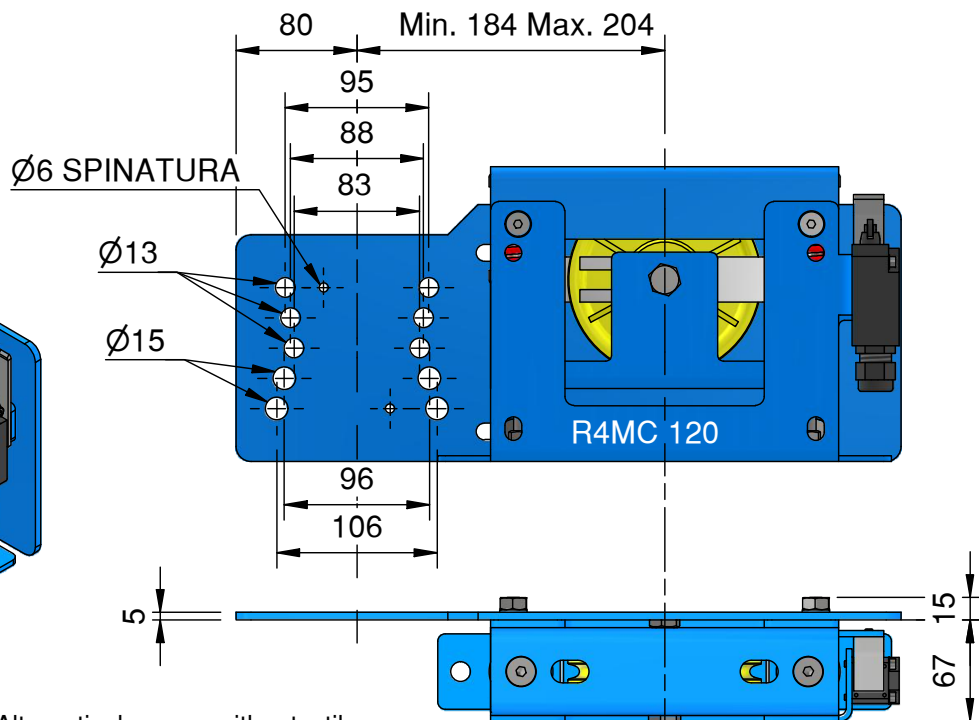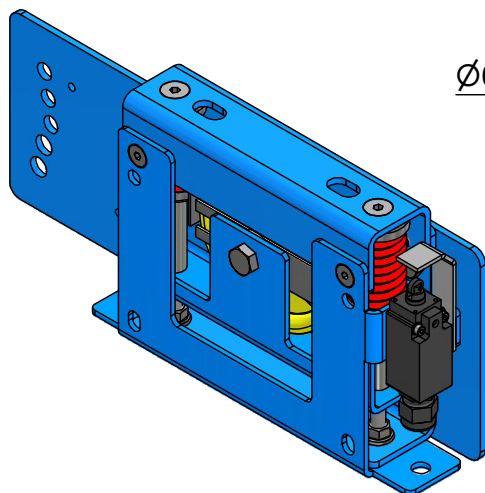

(*) In alternativa Funi in Anima Tessile / Alternatively ropes with a textile core




COMPONENTI MECCANICI
PER ASCENSORI
MECHANICAL LIFT
COMPONENTS

TENDITORE A MOLLA R4MC 150-180-200


SPRING TENSIONER R4MC 150-180-200

T242




VERSIONE PAVIMENTO FOSSA / PIT FLOOR VERSION

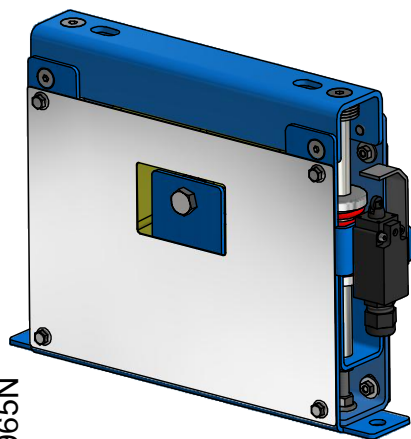

Corsa scatto contatto 18mm
Contact switching stroke 18mm
Forza min. 517 N max. 965N
Minimum force 517 N max. 965N



Deviazione max. 20 mm
Max. displacement 20 mm

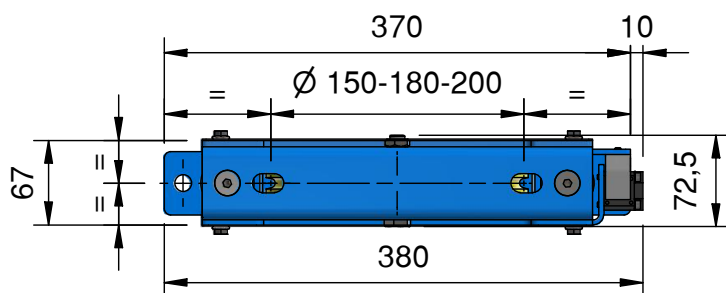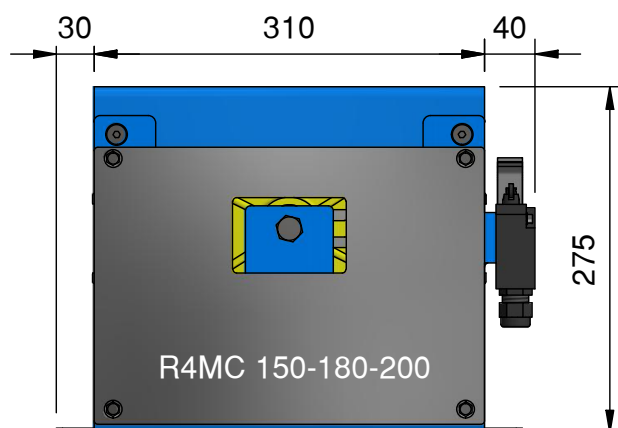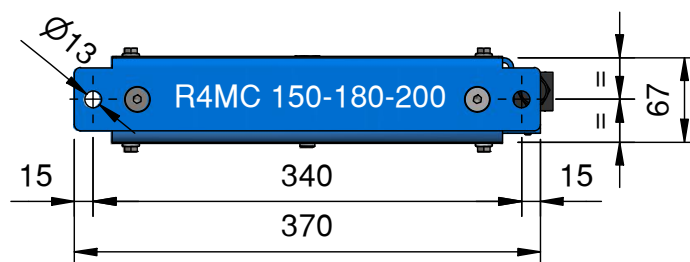

Modello Tenditore Spring tensioner model	Codice Code
R4MC 150	8024215000MC
R4MC 180	8024218000MC
R4MC 200	8024220000MC
Supporto Guida Guide bracket	8015000151


VERSIONE STAFFAGGIO GUIDA / GUIDE BRACKET VERSION

(*) Funi anima metallica IWRC d. 6 - 6,5mm Cr min. 25.9 kN

(*) Steel core wire rope IWRC d. 6 - 6,5mm Cr min. 25,9 kN

Velocità intervento max. 2 m/s


Tripping Speed max. 2 m/s

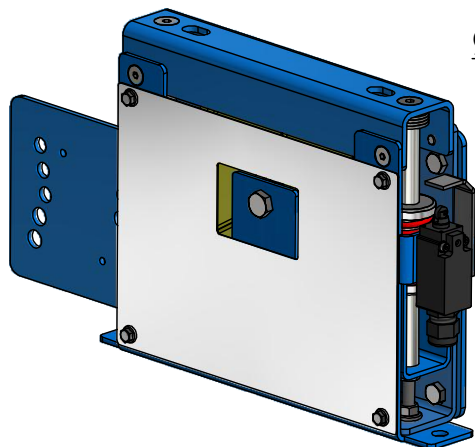

Ø6 SPINATURA

Ø13

Ø15

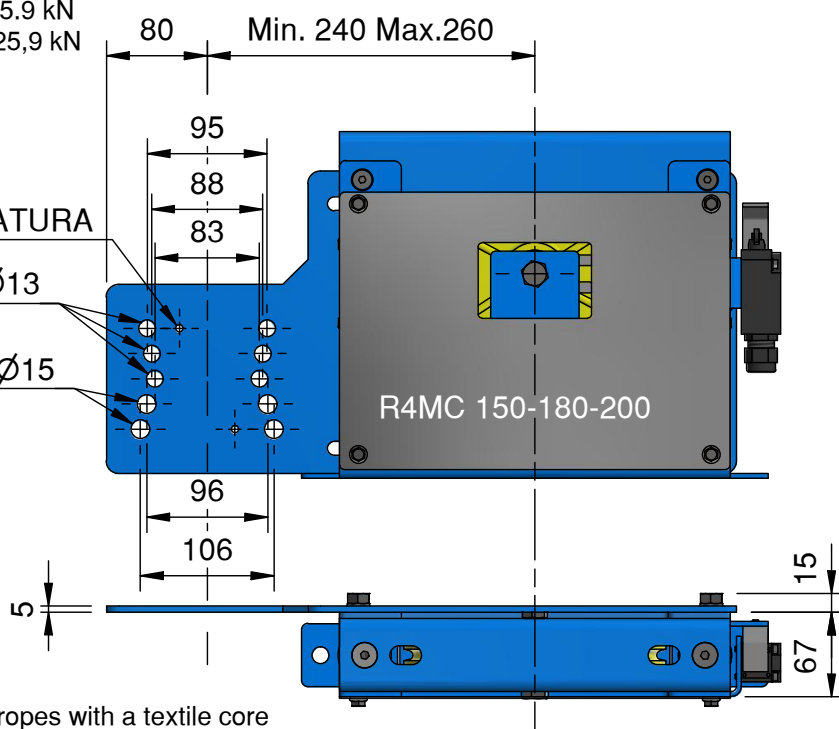

(*) In alternativa Funi in Anima Tessile / Alternatively ropes with a textile core



COMPONENTI MECCANICI
PER ASCENSORI
MECHANICAL LIFT
COMPONENTS



TENDITORE A MOLLA R4MC 250-300

SPRING TENSIONER R4MC 250-300




T242

VERSIONE PAVIMENTO FOSSA / PIT FLOOR VERSION

Corsa scatto contatto 18mm
Contact switching stroke 18mm
Forza min. 517 N max. 965N
Minimum force 517 N max.965N

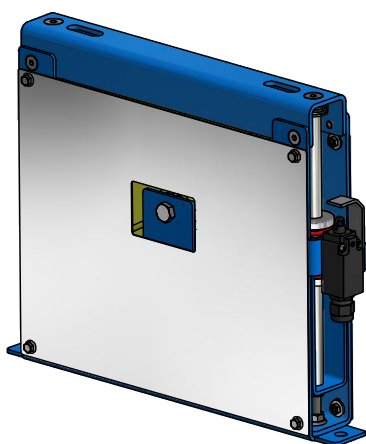

Deviazione max. 20 mm
Max. displacement 20 mm

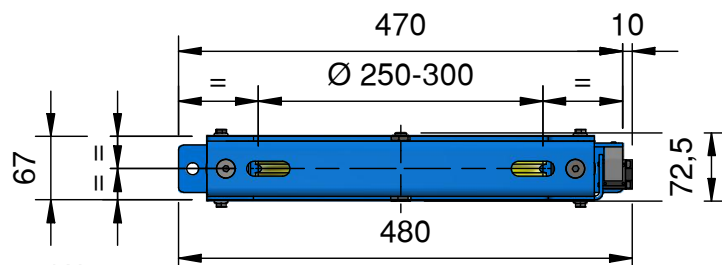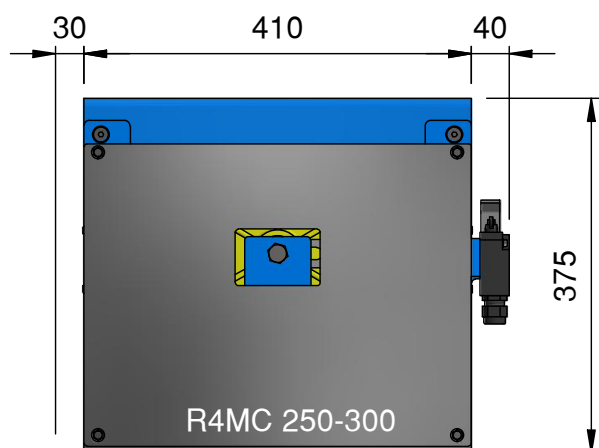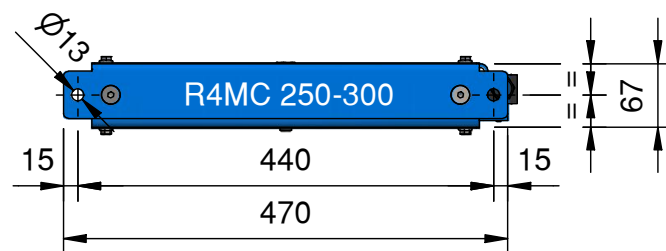

Modello Tenditore Spring tensioner model	Codice Code
R4MC 250	8024225000MC
R4MC 300	8024230000MC
Supporto Guida Guide bracket	8015000152


(*) Funi anima metallica IWRC da Ø6 a Ø8 mm Cr min. 25.9 kN

(*) Steel core wire rope IWRC da Ø6 a Ø8 mm Cr min. 25,9 kN


Velocità intervento max.2 m/s

Tripping Speed max. 2 m/s

VERSIONE STAFFAGGIO GUIDA / GUIDE BRACKET VERSION

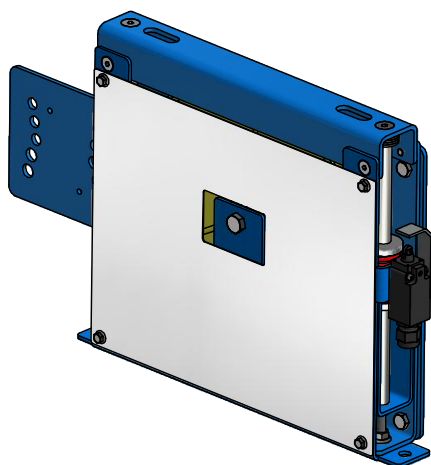

Ø6 SPINATURA

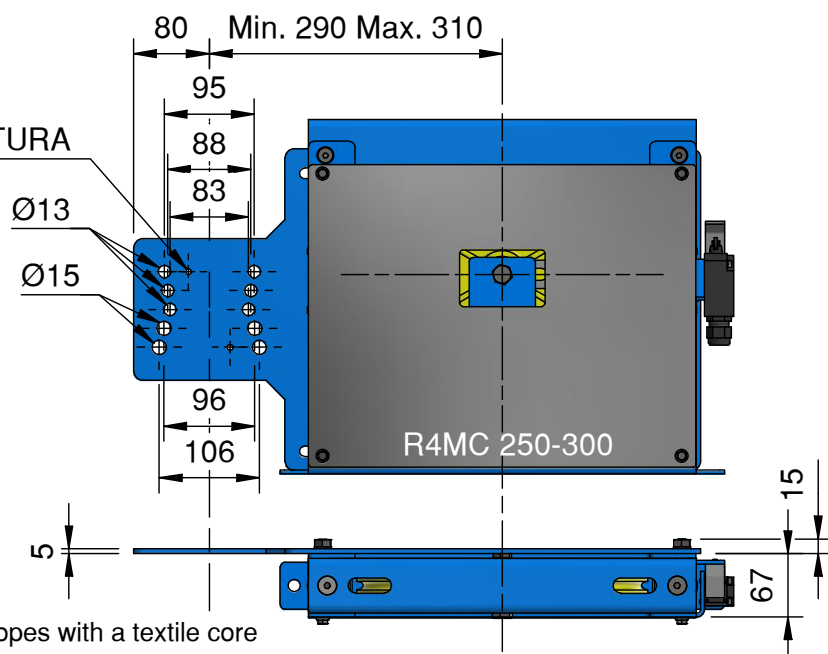

(*) In alternativa Funi in Anima Tessile / Alternatively ropes with a textile core