


S-CHIME (STAND-ALONE CHIME UNIT)

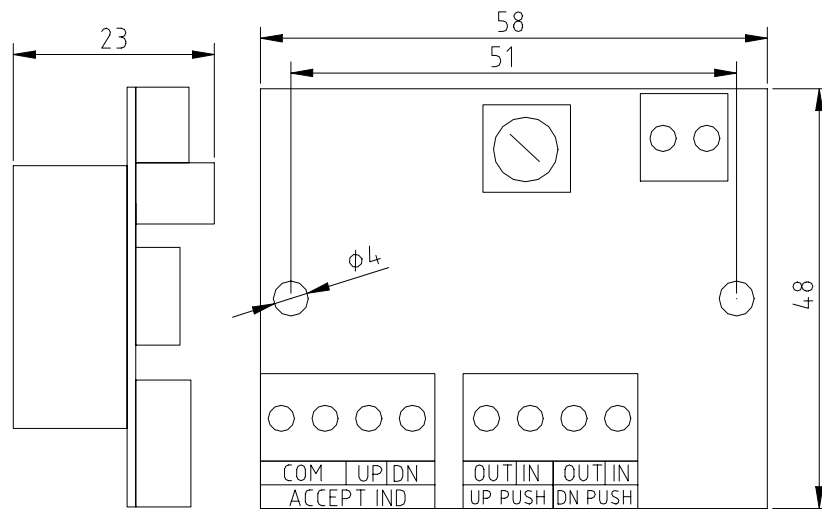

Description

Stand-alone electronic sounder for lift arrival or departure direction indication.

The S-CHIME is of compact design and is simple to install on existing circuits. It operates by connecting across the up and down hall lantern signals; this provides both the unit's power and the necessary control signalling for up/down annunciation.

Standard Features

Volume selectable
Single chime for UP direction, double chime for DOWN direction

Electrical Detail

Power derived from hall arrow signals; consumption 50mA (peak) @ 12vdc

General

Unit supplied loose with spacers.

Options

Single chime both directions
High/low and low/high chime frequency variations for direction indication
Slim-line (15mm deep)
48v ac/dc version
110v ac/dc version