

BASTILLE LED

The Bastille is a linear vandal resistant IP65 surface mounted luminaire, ideal for internal or external applications. Designed to work in particularly onerous environments prone to vandalism.

FEATURES


- Flat opal polycarbonate material as standard
- Manufactured from mild steel
- Constant output driver
- Rated to IP65 & IK10
- Integral control options available
- White finish as standard



TECHNICAL DETAILS

Part Number	Description	Replaces	Weight (kg)	No. Per 10A	Inrush Current (A)	Circuit Watts (W)	Board Lumens	Luminaire Lumens	LI/cW
BAS-22-4K-HE	White Body 2ft	2 x 18WT8	4	65	8A 80 μ s	22	3815	2480	112.7
BAS-31-4K-HE	White Body 3ft	2 x 21WT8	5.7	50	8A 80 μ s	31	5376	3495	112.7
BAS-32-4K-HE	White Body 4ft	2 x 36WT8	7.4	35	5A 37 μ s	32	5550	3607	112.7
BAS-44-4K-HE	White Body 4ft	2 x 54WT5	7.4	35	5A 37 μ s	44	7631	4960	112.7
BAS-38-4K-HE	White Body 5ft	2 x 49WT5	9.2	35	5A 37 μ s	38	6590	4284	112.7
BAS-53-4K-HE	White Body 5ft	2 x 49WT5	9.2	25	5A 37 μ s	53	9192	5975	112.7
BAS-48-4K-HE	White Body 6ft	2 x 70WT8	10.9	25	15A 50 μ s	48	8325	5411	112.7
BAS-68-4K-HE	White Body 6ft	2 x 70WT8	10.9	25	15A 50 μ s	68	11793	7666	112.7

KEY FEATURES

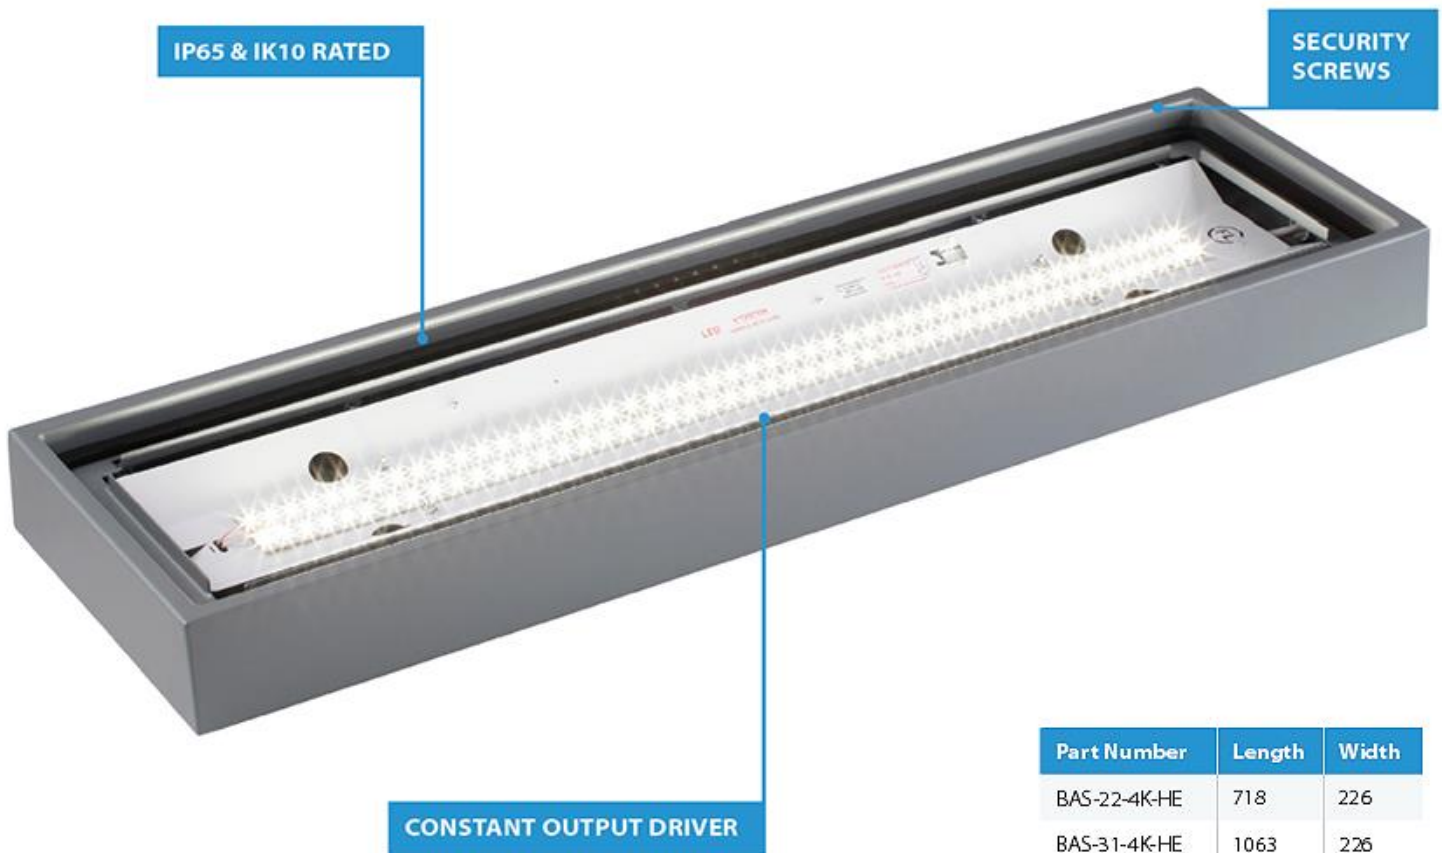

Part Number	Length	Width
BAS-22-4K-HE	718	226
BAS-31-4K-HE	1063	226
BAS-32-4K-HE	1253	226
BAS-44-4K-HE	1253	226
BAS-38-4K-HE	1565	226
BAS-53-4K-HE	1565	226
BAS-48-4K-HE	1850	226

OPTIONS AND ACCESSORIES

- EM** Integral Emergency (1W)
- EMST** Integral Emergency Self Test (1W)
- DD** SwitchDIM/DALI
- WL** Wireless Control System
- WLEM** Wireless Monitored Emergency
- MWP** Remotely Programmable Microwave
- SI** Silver
- BK** Black
- 3K** 3000K Colour Temperature
- 5K** 5000K Colour Temperature

PHOTOMETRIC AND DIMENSION

