

Description

LED wall/ceiling luminaire with adjustable power and light output option

One product with integral driver dip-switch provides option of three lumen packages :- 1220lm, 1550lm or 2600lm

Lumen package options allow retrofit of 28W, 38W or 55W CFL luminaires

Flexibility of performance allows suitability for multiple applications


Spun aluminium base with dished opal Visiluxe diffuser

Option of white chrome or satin chrome housing

LED lifespan L70 54,000Lm/W: 11W - 103lm, 14W - 100lm, 25W - 92lm

Lumens delivered 11W - 1100lm, 14W - 1400lm, 25W - 2400lm

Supplied c/w Integral driver

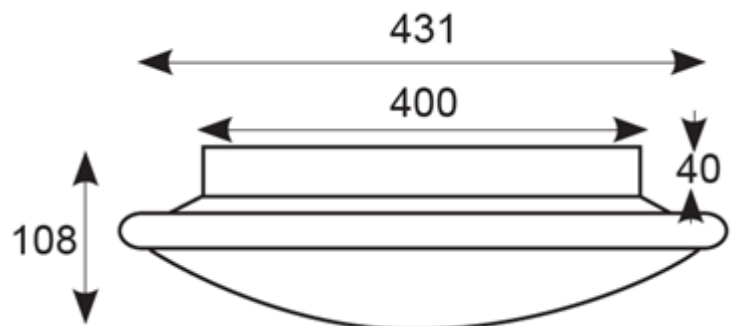

Code	Description	Lamp
AECLED/CH	11/14/25W	LED
LED Information		
Total (Watts)	11/14/25W	
Lumens Delivered		
Lm/W		
CRI	Ra 80	
CCT	4000K	
Input	230V	
Beam Angle (Degrees)		

