
TFT LCD

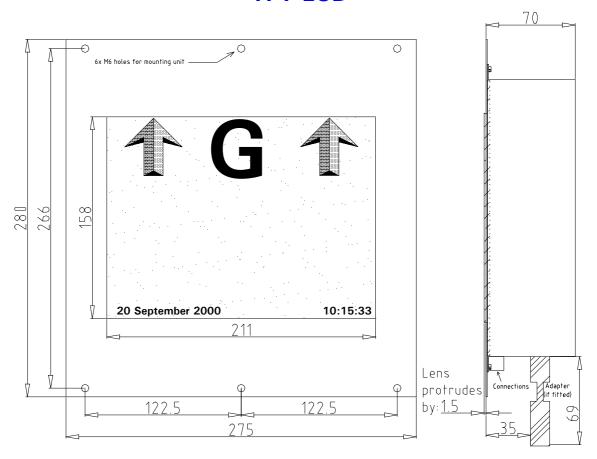

Faceplate Cut-Out: 164(h) x 217(w) mm Fixings: 6x M4x15mm studs

Description Full colour TFT LCD display: 256,000 colours, 211(w) x 158(h) viewing area,

wide viewing angle: 120 degrees (left to right), high brighness: 350cd/m²

Standard Floor 0 to 31, A to Z, -1 to -8, B1 to B8

LB, UB, SB, LG, UG, LM, UM, MZ, SL, CP, GR, 04, 03, 02, 01

Standard Features Simultaneous floor position and 3-D effect running arrows

Onward direction indication Lift status messages

Floor directories

Full screen background image or slide show screen images adverts etc. Time and date with daylight saving time and leap year correction

Electrical Detail Continuous power supply: 240vac

Power supply consumption:15w

General Unit supplied loose with a drilled and rebated clear macralon lens and fixing kit.

Optional Items Graphical image incorporation.

Remote programming kits

THIS UNIT CONNECTS ONTO OUR 4-WIRE NETWORK; THEREFORE, A CONTROL UNIT MUST BE ORDERED FOR EACH LIFT