




Double pulley cover




The diverter pulley cover is suitable for the protection of two pulleys on top of each other. This can often be found when the machine room is at the bottom. Through the 8mm perforated sheet it is possible to make a sight check of the running grooves without disassembling the cover. The cover can alternatively be attached to a concrete wall or to an iron frame. Both attachment variants are included in delivery.

Suitable entering points overview

-  suitable
-  not suitable

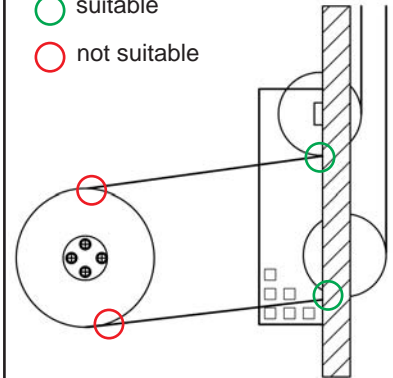

The top of the cover hood is open, so that it can also be used if there is a larger separation distance between the pulleys.

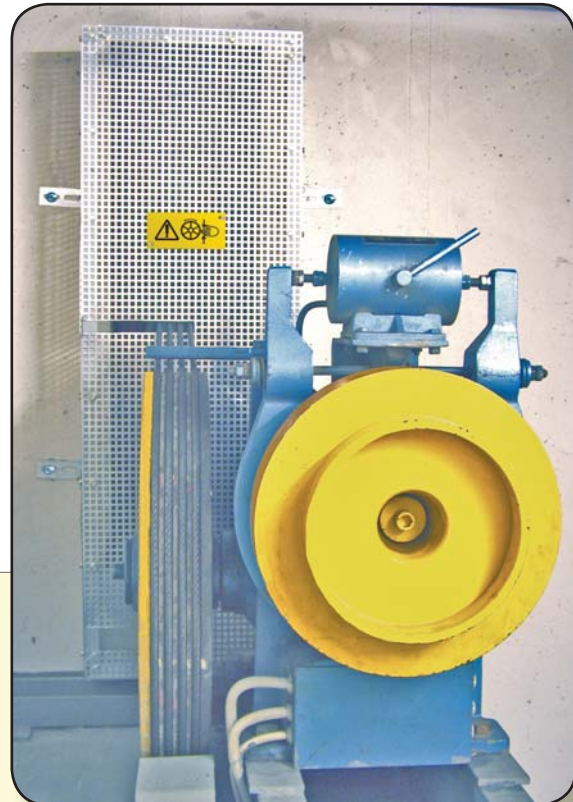

The openings for the rope are cut out on-site by the assembler.
For this purpose a usual side cutter can be used.

(Plate shears, [Art.no. 63550](#), for cutting out the rope slot can be ordered additionally on request.)



Advice:

Please note the advice "Protective covers on rotating parts" on page 155.



© 10/2009

Scope of delivery



A detailed mounting instruction is included in delivery.

Length 1000	Width			
	400	300	250	200
Height 100	78400	78406	78412	78418
150	78401	78407	78413	78419
200	78402	78408	78414	78420
250	78403	78409	78415	78421
300	78404	78410	78416	78422
400	78405	78411	78417	78423
Length 1200	Width			
	400	300	250	200
Height 100	78424	78430	78436	78442
150	78425	78431	78437	78443
200	78426	78432	78438	78444
250	78427	78433	78439	78445
300	78428	78434	78440	78446
400	78429	78435	78441	78447

