



PCW0100SS

SELF-MONITORED CONTACT NO-NC-NO


Functions

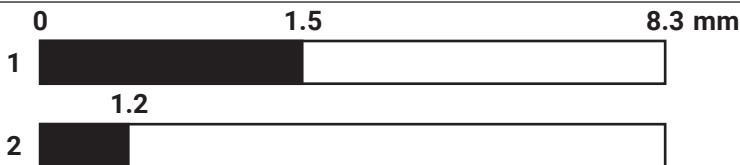


Scheme




NOT ACTIVATED CONTACT



ACTIVATED CONTACT



DETACHED CONTACT

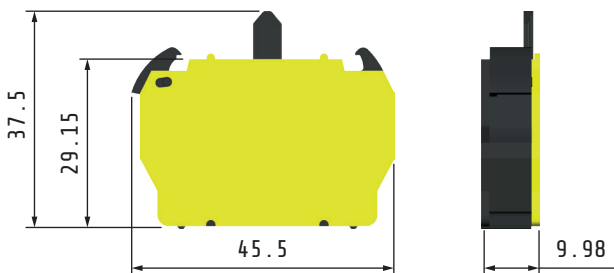

Technical data



Material / Color	- PA66 H2 G/25-V0 - YELLOW/BLACK - AgNi 10 Ø 1.00 mm	
Protection class	IP20	
Electrical characteristics	Rated insulation voltage [Ui]	690 V
	Frequency	50-60 Hz
	Direct current AC15	4 A - 400 V
	Alternate current DC13	0.25 A - 220 V
Mechanical characteristic	Minimum constant current	1 mA @ 5 V dc, 1 mA @ 24 V dc
	Tightening torque	12 lb.in. - 1.2 Nm
	Wire size	12-20 AWG
Standards	Operating temperature	-25°C ... +70°C
		IEC / EN60947-5-1 UL508