



**TITLE:**

OSP Overall Foil Screened Pairs LSZH

**CODE:**

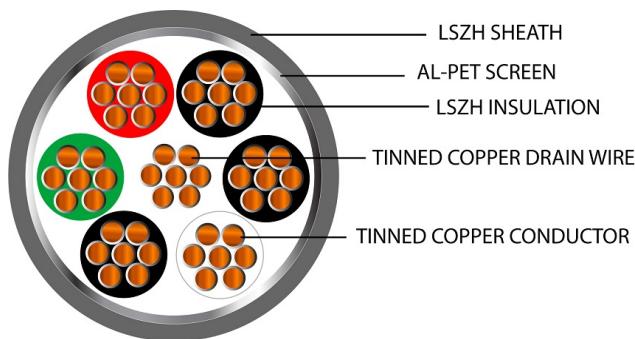
SFX/OSP3-LSZH-D-GRY-100

**DESCRIPTION:**

100m OSP3 3pr 24AWG Overall Foil  
Screen 600V Grey LSZH (9503)

**SUPPLIED AS:**

Reel of 100m





# Product Specification



## Cable Construction

Cable Construction	3 Pairs
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 8(0.20mm <sup>2</sup> )
Overall Diameter (mm)	5.70 ±0.20

## Insulation

Insulation	LSZH
Insulation Colour	Red,Black;White,Black;Green,Black
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.28

## Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Grey
Overall Diameter (mm)	5.70 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	0.70




## Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<79.000/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

## **MORE INFORMATION:**

CLASSIFICATION CRITERIA		CPR GUIDE			
EURO CLASS (ca:cable)	FIRE RATING 	SFX COMMENT	SUBCLASSIFICATIONS FOR EUROCLASSES Bca to Dca		
Reaction to Fire BS EN ISO 1716					
<b>A<sub>ca</sub></b>	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet Aca, so they should only be specified with extreme caution.	<b>(S) SMOKE PRODUCTION</b> 	<b>(D) FLAMING DROPLETS</b> 	
Reaction to Fire BS EN 50399					
<b>B1<sub>ca</sub></b>	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1ca.	BS EN 50399/BS EN 61034-2	BS EN 50399	BS EN 60754-2
<b>B2<sub>ca</sub></b>	Combustible, low flame spread & heat release contribution to the fire	Similar to Class Cca, although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	 s1a: s1 + transmittance >=80% (BS EN 61034-2)	 d0: No fall of droplets or flaming particles, times for 1200 seconds	 a1: Very low acidity (conductivity <2.5 $\mu$ S/mm & pH >4.3)
<b>C<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class Dca, this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class Cca though availability is improving.	 s1b: s1 + transmittance >=60% <80% (BS EN 61034-2)	 d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds	 a2: low acidity (conductivity <10 $\mu$ S/mm & pH >4.3)
<b>D<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	 s1: Low production of slow propagation of smoke	 d2: None of the above	 d2: None of the above
Reaction to Fire BS EN 60332-1-2					
<b>E<sub>ca</sub></b>	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	<b>Visit us online:</b> <a href="http://www.securiflex.co.uk">www.securiflex.co.uk</a>	 The Trusted Cable Brand	
<b>F<sub>ca</sub></b>	Combustible, fire spread of more than 425mm	Cables classified to Class Fca may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.	Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2ca to Eca. For a cable to meet Aca, B1ca, B2ca or Cca, there also needs to be regular on-going factory audits.		

## OUR OPERATING TEMPERATURE RANGE GUIDE

