

Cabin lighting SQUARE-LED for on-surface mounting

SQUARE-LED-AB-300:

Technical data

Switching power supply: Input 100-240V AC 50Hz/60Hz,
Output 24V- / 1A

Lamp SQUARE-LED-AB-300

Power per lamp: 18W
Luminous flux + brightness: light colour white (w): 1100lm
light colour natural white(nw): 1085lm
light colour warm white(ww): 720lm
Protection type: IP20
Protection class: III
Mounting height: 16mm

Required ceiling cutout:

4 holes of 8mm, for the fixation of the mounting plate
1 hole of at least Ø51mm, in the middle below the lamp
for the electrical ballast

Illuminance:

(Measured in a cabin with the dimensions 1200x1000x2200mm)

1x SQUARE-LED-AB-300-w **165 Lux**
1x SQUARE-LED-AB-300-nw **175 Lux**
1x SQUARE-LED-AB-300-ww **140 Lux**

dimnable (optional)

SQUARE-LED-AB-300/600:

Technical data

Switching power supply: Input 100-240V AC 50Hz/60Hz,
Output 24V- / 2A

Lamp SQUARE-LED-AB-300/600

Power per lamp: 39W
Luminous flux + brightness: light colour white (w): 2420lm
light colour natural white (nw): 2391lm
light colour warm white(ww): 1564lm
Protection type: IP20
Protection class: III
Mounting height: 16mm

Required ceiling cutout:

4 holes of 8mm, for the fixation of the mounting plate
1 hole of at least Ø51mm laterally below the lamp
for the electrical ballast

Illuminance:

(Measured in a cabin with the dimensions 1200x1000x2200mm)

1x SQUARE-LED-AB-300/600-w **315 Lux**
1x SQUARE-LED-AB-300/600-nw **360 Lux**
1x SQUARE-LED-AB-300/600-ww **300 Lux**

dimnable (optional)

SQUARE-LED-AB-600:

Technical data

Switching power supply: Input 100-240V AC 50Hz/60Hz,
Output 24V- / 2A

Lamp SQUARE-LED-AB-600

Power per lamp: 39W
Luminous flux + brightness: light colour white (w) : 2420lm
light colour natural white(nw): 2391lm
light colour warm white (ww): 1564lm
Protection type: IP20
Protection class: III
Mounting height: 16mm

Required ceiling cutout:

4 holes of 8mm, for the fixation of the mounting plate
1 hole of at least Ø51mm, in the middle below the lamp
for the electrical ballast

Illuminance:

(Measured in a cabin with the dimensions 1200x1000x2200mm)

1x SQUARE-LED-AB-600-w **320 Lux**
1x SQUARE-LED-AB-600-nw **370 Lux**
1x SQUARE-LED-AB-600-ww **280 Lux**

dimnable (optional)

Mounting plate


SQUARE-LED-AB-300



SQUARE-LED-AB-300/600



SQUARE-LED-AB-600

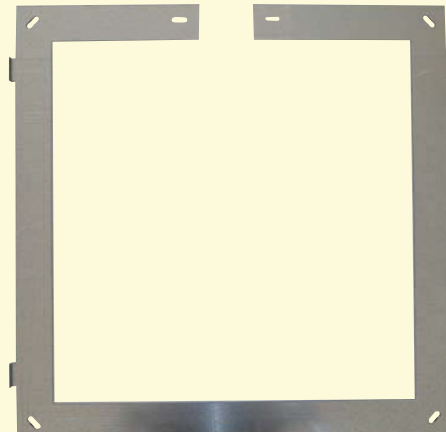

Cabin lighting SQUARE-LED for on-surface mounting



SQUARE-LED for on-surface mounting 300x300x16mm

Art.no.	Description
20322	SQUARE-LED-AB-300-w
20323	SQUARE-LED-AB-300-nw
20324	SQUARE-LED-AB-300-ww

SQUARE-LED for on-surface mounting 300x300x16mm
 Light colour white (w): 6000-7000K, 1100lm, 18W, 24V DC
 Light colour natural white (nw): 4000-5000K, 1085lm, 18W, 24V DC
 Light colour warm white (ww): 2700-3300K, 720lm, 18W, 24V DC

Included in delivery:
 1x lamp including an electronical ballast
 1x switching power supply
 1x fastening set
 1x mounting instruction



SQUARE-LED for on-surface mounting 300x600x16mm

Art.no.	Description
20325	SQUARE-LED-AB-300/600-w
20326	SQUARE-LED-AB-300/600-nw
20327	SQUARE-LED-AB-300/600-ww

SQUARE-LED for on-surface mounting 300x600x16mm
 Light colour white(w): 6000-7000K, 2420lm, 39W, 24V DC
 Light colour natural white (nw): 4000-5000K, 2391lm, 39W, 24V DC
 Light colour warm white (ww): 2700-3300K, 1564lm, 39W, 24V DC

Included in delivery :
 1x lamp including an electronical ballast
 1x switching power supply
 1x fastening set
 1x mounting instruction




SQUARE-LED for on-surface mounting 600x600x16mm

Art.no.	Description
20328	SQUARE-LED-AB-600-w
20329	SQUARE-LED-AB-600-nw
20330	SQUARE-LED-AB-600-ww

SQUARE-LED for on-surface mounting 600x600x16mm
 Light colour white (w) : 6000-7000K, 2420lm, 39W, 24V DC
 Light colour natural white (nw) : 4000-5000K, 2391lm, 39W, 24V DC
 Light colour warm white (ww) : 2700-3300K, 1564lm, 39W, 24V DC

Included in delivery :
 1x lamp including an electronical ballast
 1x switching power supply
 1x fastening set
 1x mounting instruction

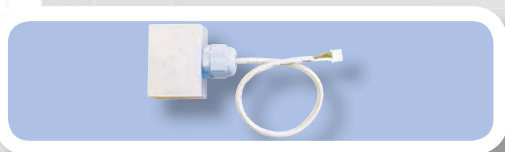

Dimmer

Art.no.	Description
20416	CabinLED-Dimmer-3pol

